

Data Sheet

OutBack Rock Speakers

OB-R6F, OB-R6G, OB-R6W



OB-R6F – Fieldstone



OB-R6G – Gray granite



OB-R6W – White sandstone

Russound's OutBack Rock Speakers provide high-fidelity sound from enclosures that blend discreetly with outdoor surroundings. Designed to emulate natural rocks, the three models are cast from glass-reinforced resin to create sturdy enclosures with low acoustic resonance for better sound.

Each speaker is silicone sealed for waterproofing. A fully painted aluminum grille blends in with the rest of the enclosure and will not rust or oxidize over time. Stringent product testing ensures stability and durability in all types of weather and environments.

For reliable audio performance, each speaker incorporates a coaxial two-way driver with a 6.5-inch polypropylene woofer and a 0.56-inch polycarbonate tweeter. The drivers are powered through a

crossover optimized for exceptional outdoor sound. Power handling is from 10 to 100 watts RMS.

For added convenience, a security eyelet is attached for anchoring the speaker in place. In addition, a 1-meter length of attached speaker cable sealed at the base of the speaker to ensure watertight integrity provides for convenient connection in a conduit body or nearby junction box.

Whether used in pairs for stereo sound or individually for mono, OutBack Rock Speakers provide an aesthetic and practical solution for any outdoor speaker application.

Russound OutBack Rock Speakers are backed by a 5-year limited warranty.

Specifications


OB-R6F

Finish:	Fieldstone
Enclosure material:	Glass-reinforced resin
Enclosure type:	Sealed
Driver array:	2-way coaxial
Woofer:	6.5" (16.5 cm) polypropylene injection-molded cone
Tweeter:	0.56" (14 mm) polycarbonate dome
Frequency response:	60 Hz – 20 kHz $\pm$ 3 dB
Nominal impedance:	8 ohms
Efficiency:	89 dB (1 W @ 1 m with 1 kHz)
Recommended power:	10–100 watts RMS
Connection:	39" (1 m) attached 2-conductor cable
Dimensions:	13" W x 12" H x 10" D (33 x 30.5 x 25.4 cm)
Weight:	13 lbs. (5.9 kg)



OB-R6G

Finish:	Gray granite
Enclosure material:	Glass-reinforced resin
Enclosure type:	Sealed
Driver array:	2-way coaxial
Woofer:	6.5" (16.5 cm) polypropylene injection-molded cone
Tweeter:	0.56" (14 mm) polycarbonate dome
Frequency response:	70 Hz – 20 kHz $\pm$ 3 dB
Nominal impedance:	8 ohms
Efficiency:	89 dB (1 W @ 1 m with 1 kHz)
Recommended power:	10–100 watts RMS
Connection:	39" (1 m) attached 2-conductor cable
Dimensions:	14" W x 10" H x 9.25" D (35.6 x 25.4 x 23.5 cm)
Weight:	10 lbs. (4.5 kg)

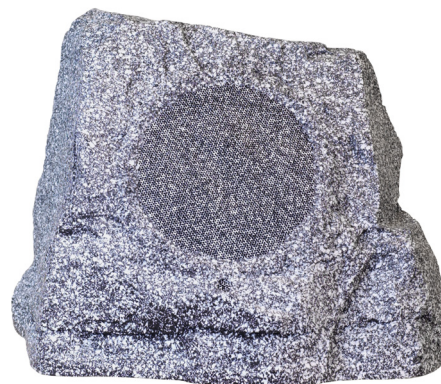

OB-R6W

Finish:	White sandstone
Enclosure material:	Glass-reinforced resin
Enclosure type:	Sealed
Driver array:	2-way coaxial
Woofer:	6.5" (16.5 cm) polypropylene injection-molded cone
Tweeter:	0.56" (14 mm) polycarbonate dome
Frequency response:	70 Hz – 20 kHz $\pm$ 3 dB
Nominal impedance:	8 ohms
Efficiency:	89 dB (1 W @ 1 m with 1 kHz)
Recommended power:	10–100 watts RMS
Connection:	39" (1 m) attached 2-conductor cable
Dimensions:	14" W x 10" H x 9.25" D (35.6 x 25.4 x 23.5 cm)
Weight:	10 lbs. (4.5 kg)



Accessories

AW162CL3 2-conductor, 16-gauge speaker cable with PVC jacket

WALTx-2 Weatherproof Stereo Volume Control

Since 1967, innovation, quality and reliability have been the core of the Russound product tradition. Today, Russound offers everything for enjoying multiroom audio-video in your home. All distributed audio-video solutions are built to high standards and designed with the unique consideration of making products that are a pleasure to live with and enjoy.

Russound 5 Forbes Road, Newmarket, New Hampshire 03857 USA 603.659.5170 www.russound.com

©2006 Russound. All rights reserved. All trademarks are the property of their respective owners. Specifications are subject to change without notice. Russound is not responsible for typographical errors or omissions.

02/06